
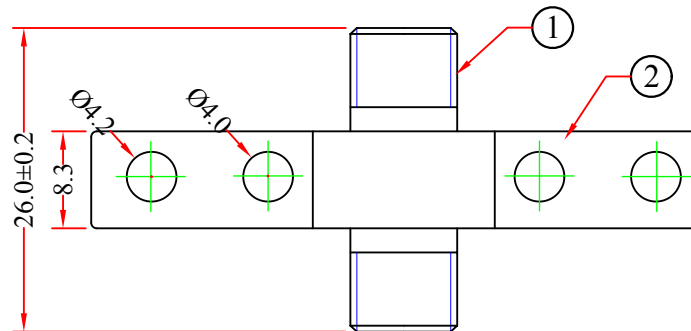
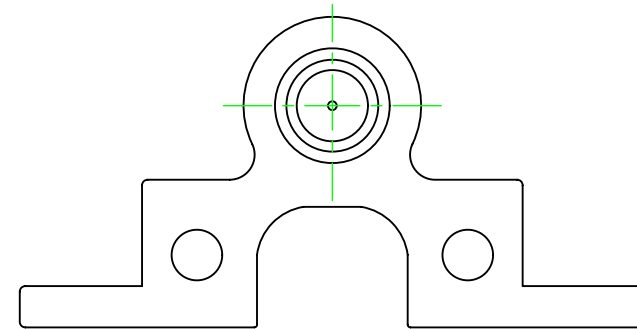


RoHS

REV.	DESCRIPTION	DATE
A		06-2013

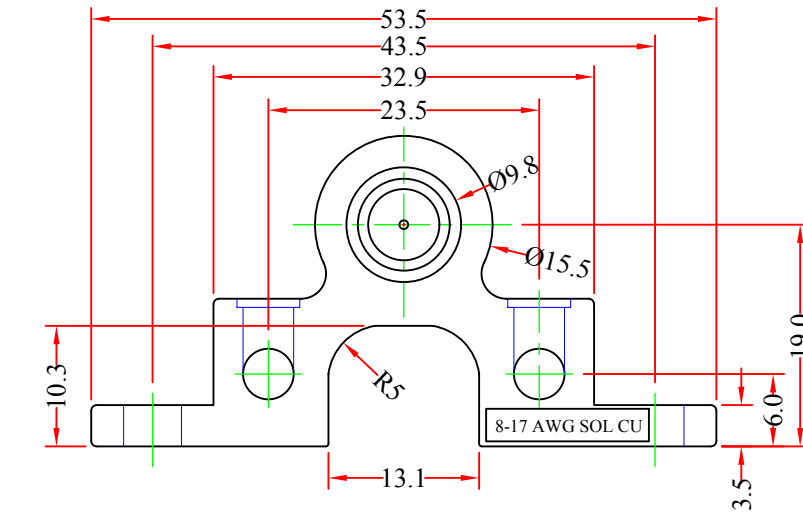

#### Mechanical Requirements




Seizing Pin Contact Points	Min Torque Withstand	Operating Temperature
4	40 in-lb	-40°C ~ 60°C

#### Electrical Specifications

Frequency Range	0-3GHz
Return Loss	-30 dB Max
Insertion Loss	0.25dB Max

#### Notes:

- 2Pcs: Mounting Screw
- 2Pcs: Ground Screw

ITEM NUMBER	200-278			DRAWER	JL
TITLE	F-pin Coaxial Grounding Block, 2.5 GHz, Single F-pin Female			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	MM		
DRAWING NO:					

2	Body/ Zinc Plated
1	F-pin Female, Dielectric Blue, Shell/ Nickel Plated, Contact: Silver Plated
NO.	SPECIFICATIONS
	BOM LIST